

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 1 167 582 A1**

(12)

**EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
02.01.2002 Bulletin 2002/01

(51) Int Cl.7: **C25D 3/32, C25D 3/60**

(21) Application number: **01305682.5**

(22) Date of filing: **29.06.2001**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE TR**  
Designated Extension States:  
**AL LT LV MK RO SI**

- Vinckler, Anja  
1602 Vlezenbeek (BE)
- Heber, Jochen  
6010 Kriens (CH)
- Zhang, Wan  
6006 Luzern (CH)

(30) Priority: **01.07.2000 US 215664 P**

(71) Applicant: **Shipley Company LLC**  
**Marlborough, MA 01752 (US)**

(74) Representative: **Buckley, Guy Julian**  
**ROHM AND HAAS (UK) LTD. European**  
**Operations Patent Department Lennig House 2**  
**Mason's Avenue**  
**Croydon CR9 3NB (GB)**

(72) Inventors:  
• Egli, Andre  
8712 Staefa (CH)

Remarks:  
file incomplete

(54) **Metal alloy compositions and plating method related thereto**

(57) The present invention provides *inter alia* electroplating compositions, methods for use of the compositions and products formed by the compositions. Electroplating compositions of the invention are characterized in significant part by a grain refiner/stabilizer additive comprising one or more non-aromatic compounds

having  $\pi$  electrons that can be delocalized, e.g., an  $\alpha,\beta$  unsaturated system or other conjugated system that contains a proximate electron-withdrawing group. Compositions of the invention provide enhanced grain refinement and increased stability in metal plating solutions, particularly in tin and tin alloy plating formulations.

**EP 1 167 582 A1**

## Description

## BACKGROUND OF THE INVENTION

## 1. Field of the Invention

[0001] This invention relates generally to the field of metal alloys useful for metal plating a wide variety of articles, including printed circuit boards and other electronic packaging devices. In particular, the invention relates to additives and their use as a grain refiner in tin and tin alloy plating formulations. Furthermore, the present invention relates to additives which improve the stability of metal plating solutions, particularly copper-based systems.

## 2. Background

[0002] For many years, tin-lead alloy electroplating has been the process of choice in applications requiring attachment of electronic components to printed wiring boards by soldering or reflowing. Such tin-lead alloys have been used as solders and solderable finishes on components. The temperature at which the solder melts is highly important. For tin-lead alloys the temperature of 183° C (eutectic Sn-Pb) matches very well the currently used materials for electronic parts. Much higher melting temperatures may result in deformations of the printed wiring board laminate, whereas distinctly reduced liquidus temperatures may lead to unwanted melting of the solder joint during other thermal operations of the assembly process.

[0003] Due to its toxic properties lead will likely be banned in electronic parts in the near future. Many tin-lead alternatives have been suggested, including pure tin, tin-silver, tin-copper, and tin-bismuth.

[0004] Electroplating articles with tin coatings is generally well known in the industry. Electroplating methods involve passing a current between two electrodes in a plating solution where one electrode is the article to be plated. A common plating solution would be an acid tin plating solution containing (1) a dissolved tin salt (such as tin alkylsulfonate), (2) an acidic electrolyte (such as alkylsulfonic acid) in an amount sufficient to impart conductivity to the bath and (3) additives (such as surfactants, brighteners, levelers and suppressants) to enhance the effectiveness and quality of plating. For example, U.S. Patent No. 5,174,887 (Federman et al.) discloses a process for the high speed electroplating of tin having as a surfactant an alkylene oxide condensation product of an organic compound having at least one hydroxy group and 20 carbon atoms or less. The organic compounds include an aliphatic hydrocarbon of between 1 and 7 carbon atoms, an unsubstituted aromatic compound or an alkylated aromatic compound having 6 carbon atoms or less in the alkyl moiety.

[0005] It is also well known to electroplate alloys with tin-alloys. For example, U.S. Patent No. 6,176,996 (Moon) discloses certain tin-alloy electroplating baths containing a tin salt, a metal salt selected from zinc, cobalt, bismuth or copper salts, methanesulfonic acid, a conductive compound and a complexing agent.

[0006] A problem with tin electroplating baths is instability, i.e. sludge may form in the bath with time. Such sludge results from oxidation and subsequent precipitation of the metals in the bath. A number of additives have been proposed to prevent or reduce such sludge formation, however such additives adversely affect certain characteristics of the metal deposit, such as grain refinement.

[0007] It thus would be desirable to have new electroplating compositions. It would be particularly desirable to have new electroplating compositions that have increased stability, i.e. prevent or reduce sludge formation. It also would be particularly desirable to have new electroplating compositions which exhibit improved grain refinement.

## SUMMARY OF THE INVENTION

[0008] We have now found new electroplating compositions that effectively plate a wide variety of articles, including printed circuit boards and other electronic packaging devices. Electroplating compositions of the invention exhibit enhanced grain refinement and stability. Using compositions of the invention, precipitation of metals from the plating solutions is eliminated or at least significantly reduced.

[0009] Compositions and methods of the invention are particularly useful for depositing solderable finishes on electronic-components such as printed wiring boards, semiconductor packaging, lead frames and connectors, and for depositing solder bumps such as those used on integrated circuits. The present compositions also may be used in a wide variety of other electronic device applications, such as in the manufacture of integrated circuits, optoelectronic devices and the like.

[0010] Electroplating compositions of the invention are characterized in significant part by an additive that dually functions as a grain refiner and a stabilizer. Preferably, such additive comprises one or more non-aromatic compounds having  $\pi$  electrons that can be delocalized. Examples of such compounds include an  $\alpha,\beta$  unsaturated system or other conjugated system that contains a proximate (e.g., within 1-2 carbons of a carbon-carbon double bond) electron-with-

drawing group.

[0011] Cyclic systems that contain endocyclic conjugation are generally preferred. Particularly preferred are keto-enole systems. Even more preferred are cyclic keto-enole systems which contain a rigid arrangement of two oxygen donors, particularly where the enole functionality is endocyclic.

[0012] Keto functionalities having a low  $pK_a$  value also are particularly preferred systems for use as stabilizer additives in electroplating compositions of the invention.

[0013] Preferable concentrations for such present additive for use in electroplating compositions of the invention are between about 2 and about 10,000 mg per L, more preferably between about 50 and about 2000 mg per L, in acid plating solutions.

[0014] Preferably, the present additive concentration is maintained at such concentrations throughout the entire or at least substantial portion of a plating cycle. Such maintenance of the stabilizer additive concentrations entails regular addition of the stabilizer additive during a plating cycle as the stabilizer additive component is consumed. Additive concentrations and replenishment rates during a plating cycle can be readily determined by known methods, such as the CPVS method as disclosed in U.S. Patents 5,252,196 and 5,223,118, both assigned to the Shipley Company, or by the cyclic voltammetric stripping (CVS) methods, or liquid chromatography.

[0015] In addition to such a grain refiner/stabilizer additive, the plating bath may optionally contain one or more reducing agents, grain refiners such as hydroxy aromatic compounds, wetting agents, brightening agents, compounds to extend the current density range, such as carboxylic acids, levelers and the like. Mixtures of additives may also be used in the present invention.

[0016] The invention also includes articles of manufacture, including electronic devices such as printed circuit boards, multi-chip modules, lead frames, connectors, semiconductor packaging, optoelectronic devices and the like that contain a deposit produced from a plating solution of the invention.

[0017] Other aspects of the invention are discussed *infra*.


#### DETAILED DESCRIPTION OF THE INVENTION

[0018] Electroplating compositions of the invention suitably contain a tin salt, an electrolyte preferably an acidic aqueous solution, and a stabilizer additive comprising one or more non-aromatic compounds having  $\pi$  electrons that can be delocalized. Compositions of the invention may optionally contain one or more reducing agents, grain refiners such as hydroxy aromatic compounds, wetting agents, brightening agents, compounds to extend the current density range, such as carboxylic acids, levelers and the like.

[0019] Compositions and methods of the invention are characterized in large part by the use of one or more stabilizer additives. Electroplating compositions of the invention comprising such stabilizer additives exhibit enhanced grain refinement and improved stability. Using compositions of the invention, precipitation of metals from the plating solutions is eliminated or at least significantly reduced.


[0020] Preferred stabilizer additives include those compounds having an  $\alpha, \beta$  unsaturated system or other conjugated system that contains a proximate (e.g., within 1-2 carbons of a carbon-carbon double bond) electron-withdrawing group.

[0021] Cyclic systems that contain endocyclic conjugation are generally preferred. Particularly preferred are keto-enole systems. Even more preferred are cyclic keto-enole systems which contain a rigid arrangement of two oxygen donors, particularly where the enole functionality is endocyclic. See, e.g., representative formulae 1A-1B below.

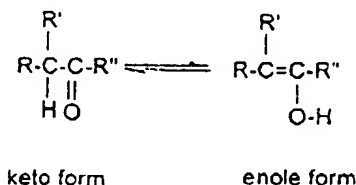

[0022] In simple cases ( $R'' = H$ , alkyl, OR, and the like), and the equilibrium lies well to the left. The keto form differs from the enole form in possessing a C-H, a C-C, and a C=O bond where the enole has a C=C, a C-O, and an O-H bond. Further aspects of ketoenole tautomerism are presented in *Advanced Organic Chemistry*, J. March, 4<sup>th</sup> ed., John Wiley & Sons, 1992, note in particular pp. 70-74 and 585-587.

[0023] Particularly preferred keto-enole tautomers are shown below as represented by formulae 11A-11C.

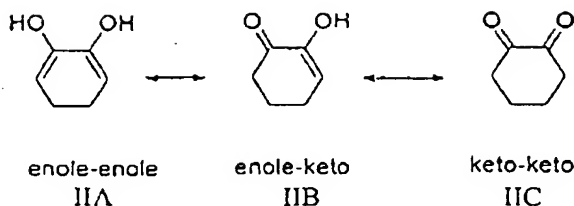

[0024] Keto functionalities having a low  $pK_a$  also are particularly preferred systems for use as the present grain refiner/stabilizer additives in electroplating compositions of the invention. This is due to the applied pH in the plating solution, which is acidic for tin plating. Particularly preferred compounds that include this structural feature include hydroxylated gamma-pyrones, e.g., maltol, ethylmaltol, kojic acid, meconic acid, comenic acid, hydroxylated benzoquinones such as chloranilic acid, dihydroxy benzoquinone, hydroxylated naphthols such as chromotropic acid, several anthraquinones, hydroxylated pyridones, cyclopentandiones, hydroxy-furanones, hydroxy-pyrrolidones, cyclohexanediones, and the like.

[0025] We have observed enhanced grain refinement and polarization in the low current density range, particularly when using stabilizer additives such as maltol, ethylmaltol, 3-methyl-1,2-cyclopentanedione and 2,5-dimethyl-4-hydroxy-3-furanone. In addition, the gamma-pyrones appear to solubilize tin(IV) in tin and tin alloy plating baths, thereby preventing or reducing the amount of precipitation of tin(IV). In an alternate embodiment, the gamma-pyrones also stabilize electroless copper solutions against plating-out.

[0026] Preferable concentrations for grain refiner/stabilizer additives for use in electroplating compositions of the invention are between about 2 and about 10,000 mg per L, more preferably between about 50 and about 2000 mg per L, in acid plating solutions. However, good results have been achieved with even lower concentrations, e.g. copper electroless plating formulations having a stabilizer additive concentration of at least about 2 mg per L of the metallization solution.

[0027] Electroplating compositions and methods of the invention are particularly well suited for use with tin and tin-alloy plating baths including, but not limited to, tin-silver, and tin-copper baths. Electroplating compositions and methods of the invention also are well suited for use with zinc and zinc-alloy plating baths. However, such compositions also are generally applicable to systems containing other alloy materials such as bismuth, indium, antimony, and gold.

[0028] Electroplating baths containing the electroplating compositions of the present invention are typically prepared by adding to a vessel one or more acidic electrolytes, followed by one or more tin compounds and optionally one or more other alloy compounds, e.g., copper compound(s), silver compound(s) and the like, and then one or more other additives, including the present grain refiner/stabilizer additive. Other orders of addition of the components of the compositions of the present invention may be used. Once the bath is prepared, undesired material is removed, such as by filtration, and then water is added to adjust the final volume of the bath. The bath may be agitated by any known means, such as stirring, swirling or shaking, for increased plating speed.

[0029] As discussed above, electroplating solutions of the invention are particularly useful for depositing solderable finishes on electronic components such as printed wiring boards, optoelectronic devices, semiconductor packaging, microchip module packaging, components, contacts, chip capacitors, chip resistors, lead frames and connectors, and for depositing solder bumps such as those used on integrated circuits.

[0030] Any substrate that can be electrolytically plated with a metal is suitable for plating according to the present invention. Suitable substrates include, but are not limited to: copper, copper alloys, nickel, nickel alloys, nickel-iron containing materials, electronic components, plastics, and the like. Suitable plastics include plastic laminates, such as printing wiring boards, particularly copper clad printed wiring boards.

[0031] The present grain refiner/stabilizer additives are useful in a wide variety of electrolytic and electroless plating baths, and preferably electrolytic plating baths. Suitable plating baths are those containing one or more metals selected from tin, copper, nickel, silver and the like, and preferably tin.

[0032] The one or more tin compounds useful in the present invention are any solution soluble tin compound. Suitable tin compounds include, but are not limited to tin salts, such as tin halides; tin sulfates; tin alkane sulfonate such as tin methane sulfonate, tin ethanesulfonate and tin propanesulfonate; tin aryl sulfonate such as tin phenyl sulfonate and tin toluene sulfonate; tin alkanol sulfonate; and the like. When tin halide is used, it is preferred that the halide is chloride. It is preferred that the tin compound is tin sulfate, tin chloride, tin alkane sulfonate or tin aryl sulfonate, and more preferably tin sulfate or tin methane sulfonate. Suitable tin alkane sulfonates include tin methanesulfonate, tin ethanesulfonate and tin propanesulfonate. Suitable tin aryl sulfonates include tin phenylsulfonate and tin toluenesulfonate. The tin compounds useful in the present invention are generally commercially available from a variety of sources.

and may be used without further purification. Alternatively, the tin compounds useful in the present invention may be prepared by methods known in the literature.

**[0033]** The amount of tin compound useful in the electrolyte compositions of the present invention is any amount that provides a tin content typically in the range of 2 to 100 g/L, and preferably 10 to 70 g/L. When the compositions of the present invention are used in a low speed plating process, the amount of tin present in the electrolyte composition is typically in the range of 2 to 60 g/L, and preferably 5 to 20 g/L. When the compositions of the present invention are used in a high speed plating process, the amount of tin present in the electrolyte composition is typically in the range of 20 to 100 g/L, and preferably 40 to 70 g/L. When the compositions of the present invention are used in high speed tin plating of steel, the amount of tin is typically in the range of 5 to 50 g/L, and preferably 10 to 30 g/L. Mixtures of tin compounds may also be used advantageously in the present invention, provided that the total amount of tin is in the range of from 2 to 100 g/L.

**[0034]** Any acidic electrolyte that is solution soluble and does not otherwise adversely affect the electrolyte composition may be used advantageously in the present invention. Suitable acidic electrolytes include, but are not limited to alkane sulfonic acids, such as methanesulfonic acid, ethanesulfonic acid and propanesulfonic acid, aryl sulfonic acids such as phenylsulfonic acid or toluenesulfonic acid, sulfuric acid, sulfamic acid, hydrochloric acid, hydrobromic acid and fluoroboric acid. Mixtures of acidic electrolytes are particularly useful, such as, but not limited to, mixtures of alkane sulfonic acids and sulfuric acid. Thus, more than one acidic electrolyte may be used advantageously in the present invention. The acidic electrolytes useful in the present invention are generally commercially available and may be used without further purification. Alternatively, the acidic electrolytes may be prepared by methods known in the literature.

**[0035]** Typically, the amount of acidic electrolyte is in the range of 10 to 400 g/L, and preferably 100 to 250 g/L. When the compositions of the present invention are used in the high speed tin plating of steel, the acidic electrolyte is typically present in an amount in the range of 20 to 80 g/L, and preferably 30 to 60 g/L. It is preferred that when the tin compound is a halide that the acidic electrolyte is the corresponding acid. For example, when tin chloride is used in the present invention, it is preferred that the acidic electrolyte is hydrochloric acid.

**[0036]** One or more alloying metals may be added to the present electroplating baths. Suitable alloying metals for a tin electroplating bath include, but are not limited to, copper, silver, zinc, bismuth, indium, antimony and gold. Preferred alloying metals are copper and silver. Such alloying metals are typically in the form of any solution soluble compound.

**[0037]** Suitable metal compounds include, but are not limited to metal halides, metal acetates, metal fluoroborates, metal sulfate, metal alkane sulfonate, metal alkanol sulfonate, metal nitrates and the like. When copper halide is used, it is preferred that the halide is chloride. It is preferred that the metal compound is metal sulfate, metal alkane sulfonate or mixtures thereof, and more preferably copper sulfate, copper methane sulfonate, silver methane sulfonate or mixtures thereof. Mixtures of alloying metal compounds may be used advantageously in the present invention. Thus, binary, ternary and high metal alloys may be produced. The alloying metal compounds useful in the present invention are generally commercially available or may be prepared by methods known in the literature.

**[0038]** The amount of alloying metal compound useful in the electrolyte compositions of the present invention is any amount that provides a metal content typically in the range of 0.01 to 10 g/L, and preferably 0.1 to 3 g/L. For a tin-copper alloy electroplating bath, the amount of copper present is typically in the range of 0.01 to 5 g/L, and preferably 0.02 to 2 g/L. For a tin-copper alloy electroplating bath used in high speed plating process, the amount of copper is typically in the range of 0.5 to 10 g/L, and preferably 0.5 to 5 g/L.

**[0039]** Reducing agents may be added to the electrolyte composition of the present invention to assist in keeping the tin in a soluble, divalent state. Suitable reducing agents include, but are not limited to, hydroquinone and hydroxylated aromatic compounds, such as resorcinol, catechol, and the like. Such reducing agents are disclosed in U.S. Patent No. 4,871,429, herein incorporated by reference to the extent it teaches the preparation and use of such compounds. The amount of such reducing agent is well known to those skilled in the art, but is typically in the range of from about 0.1 g/L to about 5 g/L.

**[0040]** Bright deposits may be obtained by adding brighteners (or brightening agents) to the electrolyte compositions of the present invention. Such brighteners are well known to those skilled in the art. Suitable brighteners include, but are not limited to aromatic aldehydes such as chlorobenzaldehyde, derivatives of aromatic aldehydes such as benzal acetone, and aliphatic aldehydes such as acetaldehyde or glutaraldehyde. Such brighteners are typically added to the compositions of the present invention to improve the appearance and reflectivity of the deposit. Typically, brighteners are used at an amount of 0.5 to 3 g/L, and preferably 1 to 2 g/L.

**[0041]** When used in the manufacture of integrated circuits, lower levels of brightening agents are typically used in the present electroplating baths. For example, such electroplating compositions of the invention preferably have a brightener agent concentration of at least about 1.5 mg per liter of plating solution (1.5 mg/L), compared to typical brightener concentrations ranging from about 0.05 to 1.0 mg/L in prior composition. More preferably, in such electroplating baths for the manufacture of integrated circuits, the brightener concentration is at least about 1.75 mg/L, and still more preferably, at least about 2, 2.5, 3, 3.5 or 4 mg/L.

**[0042]** A wide variety of brighteners, including known brightener agents, may be employed in the present electro-

plating compositions used in the manufacture of integrated circuits. Typical brighteners in such compositions contain one or more sulfur atoms, and typically without any nitrogen atoms and a molecular weight of about 1000 or less. Brightener compounds that have sulfide and/or sulfonic acid groups are generally preferred, particularly compounds that comprise a group of the formula  $R'-S-R-SO_3X$ , where R is an optionally substituted alkyl (which include cycloalkyl), optionally substituted heteroalkyl, optionally substituted aryl group, or optionally substituted heteroalicyclic; X is a counter ion such as sodium or potassium; and R' is hydrogen or a chemical bond (i.e.  $-S-R-SO_3X$  or substituent of a larger compound). Typically alkyl groups will have from one to about 16 carbons, more typically one to about 8 or 12 carbons. Heteroalkyl groups will have one or more hetero (N, O or S) atoms in the chain, and preferably have from 1 to about 16 carbons, more typically 1 to about 8 or 12 carbons. Carbocyclic aryl groups are typical aryl groups, such as phenyl and naphthyl. Heteroaromatic groups also will be suitable aryl groups, and typically contain 1 to about 3 N, O or S atoms and 1-3 separate or fused rings and include e.g. coumarinyl, quinolinyl, pyridyl, pyrazinyl, pyrimidyl, furyl, pyrrolyl, thienyl, thiazolyl, oxazolyl, oxadiazolyl, triazole, imidazolyl, indolyl, benzofuranyl, benzothiazol, and the like. Heteroalicyclic groups typically will have 1 to 3 N, O or S atoms and from 1 to 3 separate or fused rings and include e.g. tetrahydrofuranyl, thienyl, tetrahydropyranyl, piperidinyl, morpholino, pyrrolidinyl, and the like. Substituents of substituted alkyl, heteroalkyl, aryl or heteroalicyclic groups include e.g.  $C_{1-8}$  alkoxy;  $C_{1-8}$  alkyl; halogen, particularly F, Cl and Br; cyano; nitro; and the like.

[0043] Preferably, the brightener concentration is maintained throughout the entire electroplating process, or throughout at least a substantial portion of the plating process, e.g. at least about 50, 60, 70, 80 or 90 percent of the duration of the plating process. As discussed above, since brightener levels are depleted as the electroplating progresses, the brightener component is preferably regularly replenished during plating to maintain a steady state brightener concentration.

[0044] In addition to the copper salts, electrolyte and brightener, plating baths of the invention optionally may contain a variety of other components, including organic additives such as suppressor agents, leveling agents and the like.

[0045] The tin electrolyte compositions may further include one or more suppressor compounds, such as, but not limited to, alkylene oxide compounds. The one or more alkylene oxide compounds useful in the present invention are any which yield deposits having good solderability, good matte or lustrous finish with satisfactory grain refinement, are stable in the acidic electroplating bath, electroplate at high speeds, are substantially low foaming, and provide a cloud point of the bath above about 110° F (43° to 44° C). It is preferred that the alkylene oxide compounds provide no foam to the bath during the electroplating process. Suitable alkylene oxide compounds include, but are not limited to, ethylene oxide / propylene oxide ("EO/PO") copolymers, alkylene oxide condensation products of an organic compound having at least one hydroxy group and 20 carbon atoms or less, compounds prepared by adding oxypropylene to polyoxyethylene glycol, and the like. Typically, the EO/PO copolymers have an average molecular weight in the range of from about 500 to about 10,000, and preferably from about 1000 to about 5000. It is preferred that the alkylene oxide compound is an EO/PO copolymer.

[0046] Suitable alkylene oxide condensation products of an organic compound having at least one hydroxy group and 20 carbon atoms or less include those having an aliphatic hydrocarbon of from one to seven carbon atoms, an unsubstituted aromatic compound or an alkylated aromatic compound having about six carbon atoms or less in the alkyl moiety, such as those disclosed in U.S. Patent No. 5,174,887, herein incorporated by reference to the extent it teaches the preparation and use of these compounds. The aliphatic alcohols may be saturated or unsaturated. Suitable aromatic compounds are those having up to two aromatic rings. The aromatic alcohols typically have up to 20 carbon atoms prior to derivatization with ethylene oxide ("EO"). Such aliphatic and aromatic alcohols may be further substituted, such as with sulfate or sulfonate groups. Such suitable alkylene oxide compounds include, but are not limited to: ethyloxylated polystyrenated phenol having 12 moles of EO, ethyloxylated butanol having 5 moles of EO, ethyloxylated butanol having 16 moles of EO, ethyloxylated butanol having 8 moles of EO, ethyloxylated octanol having 12 moles of EO, ethyloxylated beta-naphthol having 13 moles of EO, ethyloxylated bisphenol A having 10 moles of EO, ethyloxylated sulfated bisphenol A having 30 moles of EO and ethyloxylated bisphenol A having 8 moles of EO.

[0047] Typically, the one or more alkylene oxide compounds are present in the electrolyte compositions of the present invention in an amount of from 0.1 to 15 g/L, and preferably 0.5 to 10 g/L.

[0048] Additionally or alternately, the present compositions may include one or more polyalkylene glycols. Suitable polyalkylene glycols are any which are compatible with the electrolyte composition, yield deposits having good solderability, good matte or lustrous finish with satisfactory grain refinement, are stable in the acidic electroplating bath, electroplate at high speeds, are substantially low foaming, and provide a cloud point of the bath above about 110° F (43° to 44° C). Suitable polyalkylene glycols include, but are not limited to, polyethylene glycol and polypropylene glycol, and preferably polyethylene glycol. Such polyalkylene glycols are generally commercially available from a variety of sources and may be used without further purification.

[0049] Typically, the polyalkylene glycols useful in the present invention are those having an average molecular weight in the range of from about 200 to about 100,000, and preferably from about 900 to about 20,000. Such polyalkylene glycols are present in the electrolyte compositions of the present invention in an amount of from about 0.1 to

about 15 g/L, preferably from about 0.25 to about 10 g/L, and more preferably from about 0.5 to about 8 g/L.

[0050] Other suitable suppressors include, but are not limited to, amines such as ethoxylated amines, polyoxy-alkylene amines and alkanol amines; amides; alkylpolyether sulfonates; complexing surfactants such as alkoxylated diamines; and complexing agents for cupric or cuprous ions which include eutrol, citric acid, edetic acid, tartaric acid, potassium sodium tartrate, acetonitrile, cupreine and pyridine. Typically, such other suppressors are used in the same amounts as those described above.

[0051] Particularly suitable surfactants for plating compositions of the invention are commercially available polyethylene glycol copolymers, including polyethylene glycol copolymers. Such polymers are available from e.g. BASF (sold by BASF under Tetronic and Pluronic tradenames), and copolymers from Chemax. A butylalcohol-ethylene oxide-propylene oxide copolymer having a  $M_w$  of about 1800 from Chemax is particularly preferred.

[0052] It will be appreciated by those skilled in the art that carboxy aromatic compounds or other wetting agents may be added to the electrolyte compositions of the present invention to provide further grain refinement. Such carboxy aromatic compounds function as grain refiners and may be added to the electrolyte composition of the present invention to further improve deposit appearance and operating current density range. A wide variety of such carboxy aromatic compounds are well known to those skilled in the art, such as picolinic acid, nicotinic acid, and isonicotinic acid. Suitable other wetting agents include, but are not limited to: alkoxylates, such as the polyethoxylated amines JEFFAMINE T-403 or TRITON RW, or sulfated alkyl ethoxylates, such as TRITON QS-15, and gelatin or gelatin derivatives. The amounts of such grain refiners useful in the present invention are well known to those skilled in the art and typically are in the range of 0.01 to 20 g/L, preferably 0.5 to 8 g/L, and more preferably 1 to 5 g/L.

[0053] The present metal electroplating compositions are suitably used in a similar manner as prior metal electroplating baths, except that one or more of the present grain refiner/stabilizer additives are employed and preferably maintained at the noted concentration throughout a plating cycle. The electrolyte compositions of the present invention are useful in any plating method where a tin or tin-alloy deposit is desired. Suitable plating methods include, but are not limited to barrel plating, rack plating and high speed plating. A tin or tin-alloy deposit may be plated on a substrate by the steps of contacting the substrate with the electrolyte composition described above and passing a current through the electrolyte to deposit the tin or tin-alloy on the substrate.

[0054] The electrolyte compositions of the present invention and plating baths prepared therefrom typically are acidic, i.e. having a pH of less than 7, typically less than 1. If a composition of a specific pH is desired, such as in the range of 2.5 to 4.5, then appropriate adjustment of the pH is necessary. Such pH adjustment may be made by any known methods, such as the addition of base or use of lesser amounts of acidic electrolyte. Such electrolyte compositions of the present invention having a pH of in the range of 2.5 to 4.5 are particularly suited for use in the plating of components containing pH-sensitive materials such as, for example, glass or ceramic capacitors and resistors.

[0055] Plating baths of the invention are preferably employed at or above room temperature, e.g. up to and somewhat above 25° C. Typical temperatures are in the range of, but not limited to, 60° to 150° F (15° to 66° C) or higher, and preferably 70° to 125° F (21° to 52° C), and more preferably 75° to 120° F (23° to 49° C). It will be appreciated by those skilled in the art that lower plating temperatures are typically used with low speed, or non-high speed, plating systems and/or the use of brighteners. It also will be appreciated by those skilled in the art that higher temperatures are used with high speed plating systems. The plating composition is preferably agitated during use such as by air sparger, work piece agitation, impingement or other suitable method. Plating is preferably conducted at a current ranging from 1 to 2000 ASF (0.1 to 200 ASD) depending upon the metal to be plated, the particular plating method used and the substrate characteristics. When a non-high speed electroplating process is used, the current density is typically in the range of 1 to 40 ASF, and preferably 1 to 30 ASF. For example, when the electrolyte compositions of the present invention are used to deposit tin on connector strips in a high speed plating processes, a suitable current density is 10 to 60 ASD, resulting in a tin deposit having a thickness of typically from 1 to 15 microns. Plating time may range from about 5 minutes to 1 hour or more, depending on the difficulty of the work piece. See generally the examples which follow for exemplary preferred procedures.

[0056] The present invention is particularly suitable for depositing a solderable finish on an electronic device substrate. A wide variety of substrates may be plated with the compositions of the invention, as discussed above. Suitable substrates include, but are not limited to printed wiring boards, optoelectronic devices, semiconductor packages, microchip module packages, components, contacts, chip capacitors, chip resistors, lead frames, connectors, or integrated circuits. See the examples which follow for exemplary substrates plated in accordance with the invention.

[0057] All documents mentioned herein are fully incorporated herein by reference. The following non-limiting examples are illustrative of the invention.

#### Example 1 (pure tin)

[0058] An electroplating composition of the invention was prepared by admixing the following components.

Tin (as Stannous Methanesulphonate)	40 g/L
Methanesulphonic Acid	200 mL/L
Polyalkoxylate	2 g/L
Ethylmaltol	1 g/L

[0059] An electrolyte bath was prepared by combining the electroplating composition with water to provide the desired volume. A printed circuit board substrate was plated by placing the substrate in the bath and treating the bath with a current density of 14,5 mA/cm<sup>2</sup> (waveform was DC; temperature plating bath was 35° C). After plating, the substrate was removed and found to contain the desired tin deposit. It was observed that the electroplating composition plated effectively and had a semi-bright, uniform appearance. The electroplating composition also exhibited improved grain refinement and stability.

Example 2 (tin-silver; low CD range)

[0060] The procedure of Example 1 was repeated except that the electroplating composition contained the following components. Similar high quality results were observed.

Tin (as Stannous Methanesulphonate)	20 g/L
Silver (as Silver Methanesulphonate)	0.5 g/L
Thiourea	3 g/L
Methanesulphonic Acid	50 mL/L
Polyalkoxylate	2 g/L
Ethylmaltol	0.6 g/L
Maltol	0.3 g/L

Example 3 (tin-silver; high CD range)

[0061] The procedure of Example 1 was repeated except that the electroplating composition contained the following components. Similar high quality results were observed.

Tin (as Stannous Methanesulphonate)	50 g/L
Silver (as Silver Methanesulphonate)	1.5 g/L
Thiourea	6 g/L
Methanesulphonic Acid	200 mL/L
Polyalkoxylate	2 g/L
Ethylmaltol	0.25 g/L
3-Methyl-1,2-cyclopentanedione	0.25 g/L

Example 4 (tin-copper)

[0062] The procedure of Example 1 was repeated except that the electroplating composition contained the following components. Similar high quality results were observed.

Tin (as Stannous Methanesulphonate)	60 g/L
Copper (as Copper Methanesulphonate)	2 g/L
Methanesulphonic Acid	200 mL/L
Polyalkoxylate	4.5 g/L
Ethylmaltol	1 g/L

## Claims

1. An electroplating composition comprising:



at least one soluble metal salt,  
an electrolyte, and  
a grain refiner/stabilizer additive comprising one or more non-aromatic compounds having  $\pi$  electrons that  
can be delocalized.

5

2. The composition of claim 1 wherein the metal salt comprises tin.
3. The composition of claim 1 further comprising one or more alloying metals selected from copper or silver.
- 10 4. The composition of claim 1 wherein the non-aromatic compound comprises an  $\alpha,\beta$  unsaturated system or other conjugated system that contains a proximate electron-withdrawing group.
5. The composition of claim 1 wherein the non-aromatic compound comprises a cyclic system having endocyclic conjugation.
- 15 6. The composition of claim 1 wherein the non-aromatic compound comprises one or more keto-enole systems.
7. The composition of claim 6 wherein one or more of the keto-enole systems are cyclic.
- 20 8. The composition of claim 7 wherein the cyclic keto-enole systems comprise an enole functionality which is endocyclic.
9. The composition of claim 1 wherein the grain refiner/stabilizer additive has a concentration of between about 2 mg and about 10,000 mg per liter of the electroplating composition.
- 25 10. The composition of claim 1 wherein the grain refiner/stabilizer additive has a concentration of between about 50 mg and about 2000 mg per liter of the electroplating composition.
11. The composition of claim 1 further comprising a brightener agent.
- 30 12. The composition of claim 1 further comprising a suppressor agent.
13. The composition of claim 1 wherein the composition further comprises a leveler agent.
- 35 14. The composition of claim 1 wherein the electroplating composition is acidic.
15. A method for depositing a solderable finish on an electronic device substrate, the method comprising:  
electrolytically depositing onto the substrate a metal from an electroplating composition that comprises at least  
40 one soluble metal salt, an electrolyte, at least one grain refiner/stabilizer additive comprising one or more non-aromatic compounds having  $\pi$  electrons that can be delocalized.
16. The method of claim 15 wherein the metal salt comprises tin.
- 45 17. The method of claim 15 wherein the non-aromatic compound comprises an  $\alpha,\beta$  unsaturated system or other conjugated system that contains a proximate electron-withdrawing group.
18. The method of claim 15 wherein the grain refiner/stabilizer additive is present at concentration of between about 2 mg and about 10,000 mg per liter of the electroplating composition.
- 50 19. The method of claim 15 wherein the stabilizer additive is present at concentration of between about 50 mg and about 2000 mg per liter of the electroplating composition.
20. The method of claim 15 further comprising a brightener agent.
- 55 21. The method of claim 15 wherein the composition further comprises a suppressor agent.
22. The method of claim 15 wherein the composition further comprises a leveler agent.

**EP 1 167 582 A1**

**23.** The method of claim 15 wherein the substrate is a printed circuit board substrate or semiconductor with one or more microvias.

**24.** The method of claim 15 wherein the substrate is a microchip module substrate.

**25.** An article of manufacture comprising an electronic device substrate having thereon an electrolytic tin deposit obtained from an electroplating composition that comprises at least one soluble tin salt, an electrolyte, and a grain refiner/stabilizer additive comprising one or more non-aromatic compounds having  $\pi$  electrons that can be delocalized.

**26.** The article of claim 25 wherein the substrate is a printed wiring board, optoelectronic device, semiconductor package, microchip module package, component, contact, chip capacitor, chip resistor, lead frame, connector, or integrated circuits.



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 01 30 5682

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	DATABASE WPI Section Ch, Week 199954 Derwent Publications Ltd., London, GB; Class E19, AN 1999-632015 XP002178905 & RU 2 113 555 C (UNIV MENDELEEV CHEM TECHN), 20 June 1998 (1998-06-20) * abstract *	1,2,4,6, 9,14-18	C25D3/32 C25D3/60
X	DE 25 10 870 A (TOHO BESLON CO) 25 September 1975 (1975-09-25) * page 5, paragraph 2 - page 6 * * page 11 *	1,2,6,9, 15,16, 18,23-26	
X	US 4 242 182 A (POPESCU FRANCINE) 30 December 1980 (1980-12-30) * column 2, line 41-51 * * table 3 * * claim 1 *	1,2,4,6, 14-16	
X	EP 0 362 981 A (MACDERMID INC) 11 April 1990 (1990-04-11) * page 2, line 19-27 * * example 2 * * claims 1,5,7 *	1,2,6, 9-16, 18-22	TECHNICAL FIELDS SEARCHED (Int.Cl.7) C25D
X	DATABASE WPI Section Ch, Week 198125 Derwent Publications Ltd., London, GB; Class E17, AN 1981-45667D XP002178906 & SU 768 859 A (AS LITH CHEM TECH), 7 October 1980 (1980-10-07) * abstract * --- -/--	1,2,6,9, 14-16,18	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 1 October 2001	Examiner Zech, N
CATEGORY OF CITED DOCUMENTS X: particularly relevant if taken alone Y: particularly relevant if combined with another document of the same category A: technological background O: non-written disclosure P: intermediate document T: theory or principle underlying the invention E: earlier patent document, but published on, or after the filing date D: document cited in the application L: document cited for other reasons & : member of the same patent family, corresponding document			

EPO-HJ/AM 1500 (01/02) (P4/C01)



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 01 30 5682

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	US 3 429 790 A (SCHOOT CORNELIS JOHANNES ET AL) 25 February 1969 (1969-02-25) * column 1, line 61 - column 2, line 13 * * examples *	1,2,6,9, 15,16,18	
X	US 3 769 179 A (MALAK T ET AL) 30 October 1973 (1973-10-30)  * column 4, line 26-28,35,36 *	1,4-8, 15,17, 23,24 25,26	
A			
X	US 4 830 903 A (LEVY MOSHE) 16 May 1989 (1989-05-16)  * column 3, line 12 - line 16 * * column 4, line 13,14 * * column 5, line 14-16,27-61 *	1,4-8, 15,17, 23,24	
X	US 2 109 887 A (VINCENT MATTACOTTI) 1 March 1938 (1938-03-01) * page 1, column 2, line 10-23 * * claims 2,4 *	1,6,15	
X	DATABASE WPI Section Ch, Week 198604 Derwent Publications Ltd., London, GB; Class M11, AN 1986-024460 XP002178907 & JP 60 245797 A (NIPPON STEEL CORP), 5 December 1985 (1985-12-05) * abstract *	1,6,15	TECHNICAL FIELDS SEARCHED (Int.Cl.7)
A	GB 1 304 844 A (OXY METAL FINISHING) 31 January 1973 (1973-01-31) * page 1, line 10-19 * * page 4, line 48-54 * * page 6; table 1 *	1,4-8, 15,17	
-/--			
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>1 October 2001</b>	Examiner <b>Zech, N</b>
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons</p> <p>&amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03/82 (P04C01)



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 01 30 5682

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.C1.7)
A	PATENT ABSTRACTS OF JAPAN vol. 013, no. 419 (C-637), 18 September 1989 (1989-09-18) & JP 01 156490 A (NIPPON ENGERUHARUDO KK), 20 June 1989 (1989-06-20) * abstract *	1-3, 6, 7, 15, 16	
A	--- DATABASE WPI Section Ch, Week 197650 Derwent Publications Ltd., London, GB; Class M11, AN 1976-93318X XP002178908 & JP 51 123731 A (NIHON KAGAKU SANGYO), 28 October 1976 (1976-10-28) * abstract *	1-3, 15, 16	
			TECHNICAL FIELDS SEARCHED (Int.C1.7)
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 1 October 2001	Examiner Zech, N
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPC FORM 1503 03/82 (P/MC/01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 30 5682

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

01-10-2001

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
RU 2113555 C	20-06-1998	RU 2113555 C1	20-06-1998
DE 2510870 A	25-09-1975	JP 1042751 C	23-04-1981
		JP 51083841 A	22-07-1976
		JP 55034877 B	10-09-1980
		JP 50122436 A	26-09-1975
		DE 2510870 A1	25-09-1975
US 4242182 A	30-12-1980	NONE	
EP 0362981 A	11-04-1990	US 4849059 A	18-07-1989
		CA 1308057 A1	29-09-1992
		DE 362981 T1	18-10-1990
		EP 0362981 A1	11-04-1990
		JP 1652807 C	30-03-1992
		JP 2107793 A	19-04-1990
		JP 3017912 B	11-03-1991
SU 768859 A	07-10-1980	SU 768859 A1	07-10-1980
US 3429790 A	25-02-1969	NL 6505921 A	14-11-1966
		BE 680770 A	09-11-1966
		DE 1264919 B	
		FR 1479037 A	19-07-1967
		GB 1084378 A	20-09-1967
US 3769179 A	30-10-1973	CA 966587 A1	22-04-1975
		FR 2168282 A2	31-08-1973
		GB 1379849 A	08-01-1975
		JP 48082358 A	02-11-1973
		NL 7212062 A	23-07-1973
US 4830903 A	16-05-1989	US 4668354 A	26-05-1987
		AU 597712 B2	07-06-1990
		AU 7769787 A	03-03-1988
		BR 8704363 A	19-04-1988
		CA 1324338 A1	16-11-1993
		DE 3769403 D1	23-05-1991
		EP 0259126 A1	09-03-1988
		HK 53091 A	19-07-1991
		JP 1626173 C	28-11-1991
		JP 2042914 B	26-09-1990
		JP 63069995 A	30-03-1988
		KR 9005138 B1	20-07-1990
		SG 43291 G	26-07-1991

EPO FORM P/439

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 30 5682

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

01-10-2001

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
US 2109887	A	01-03-1938	NONE		
JP 60245797	A	05-12-1985	JP	1590163 C	30-11-1990
			JP	2009679 B	02-03-1990
GB 1304844	A	31-01-1973	CA	931108 A1	31-07-1973
			DE	2019591 A1	04-11-1971
			ES	378979 A1	01-08-1972
			FR	2039456 A7	15-01-1971
			NL	7005999 A	27-10-1970
JP 01156490	A	20-06-1989	JP	2572792 B2	16-01-1997
JP 51123731	A	28-10-1976	JP	974106 C	19-10-1979
			JP	54006015 B	23-03-1979

EPO FORM P4/98

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82